


WHITE PAPER

# Peel Strength

Peel strength testing is carried out to assess the adhesion quality of the composite structure. A lack of adhesion strength between the face sheets and the core material can lead to unpredictable interface failure when in service.

[www.armacell.com/armapet](http://www.armacell.com/armapet)

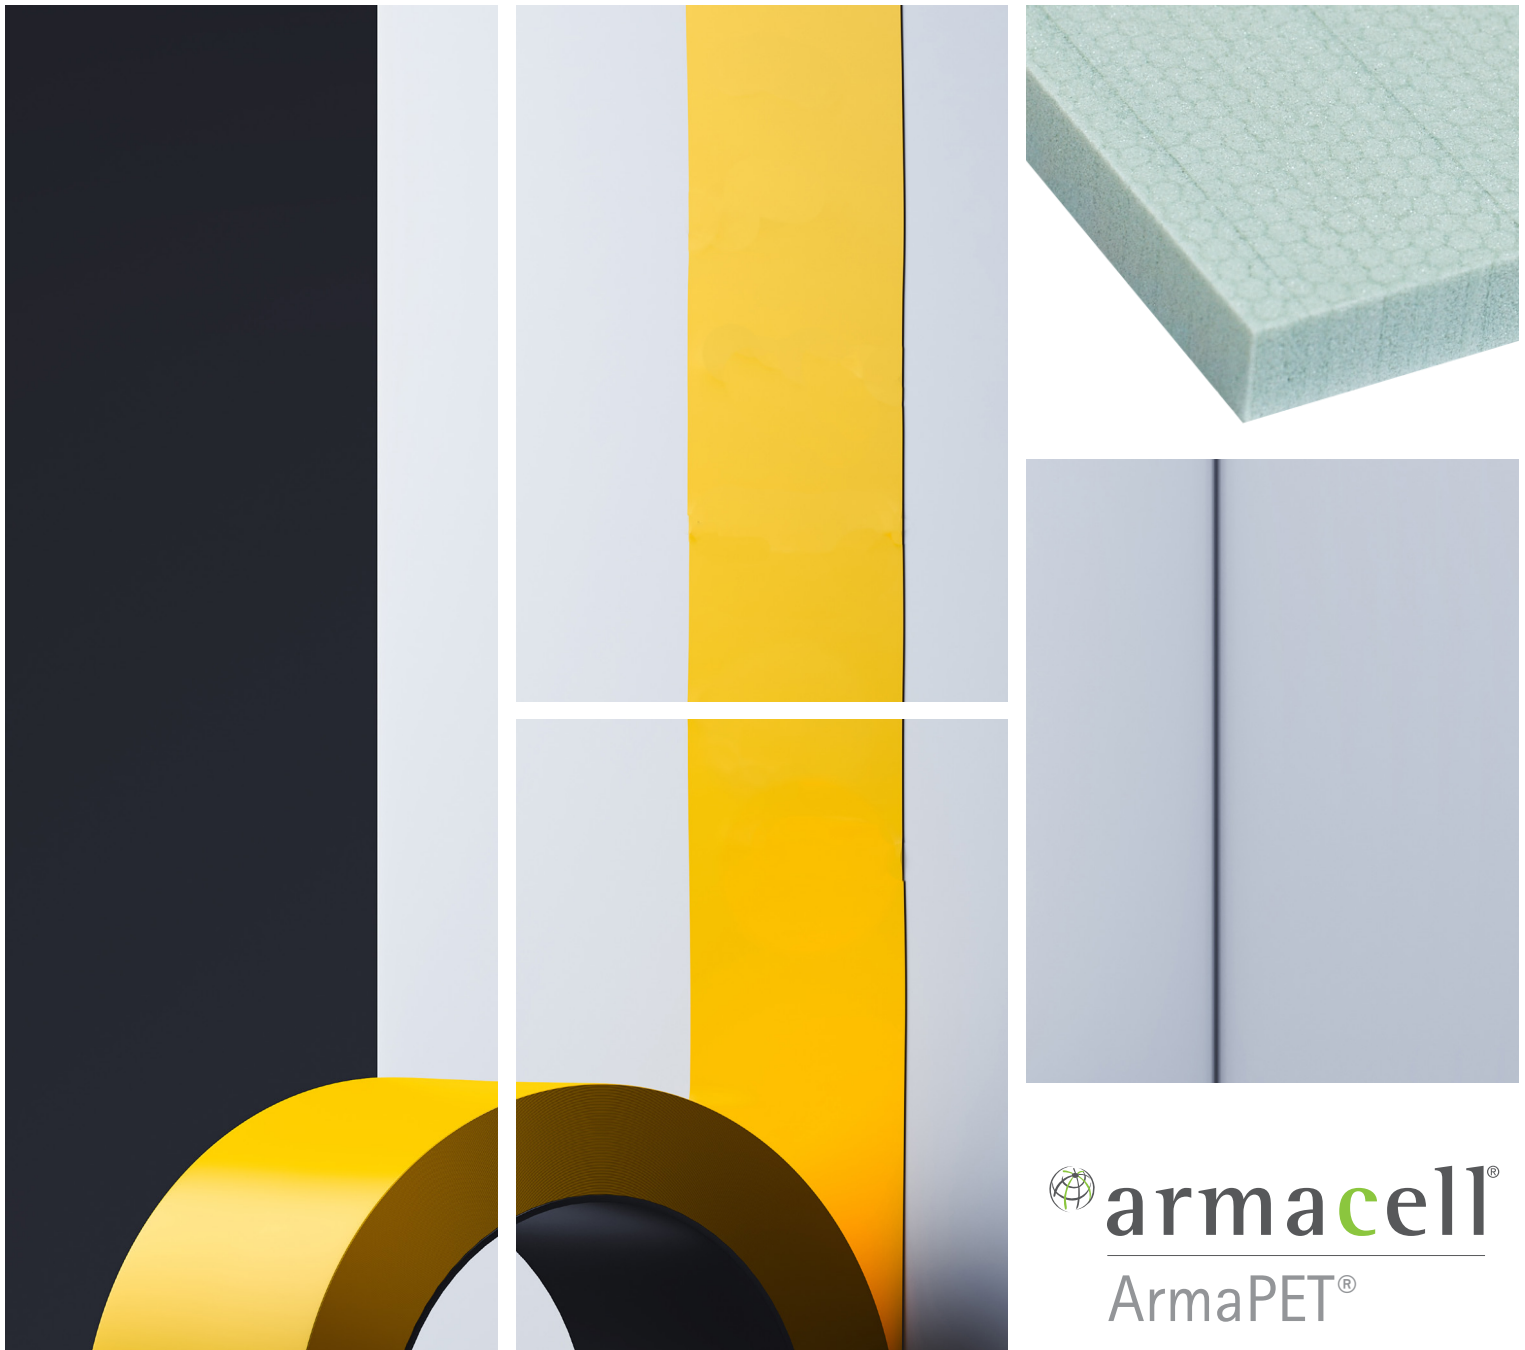

 **armacell**<sup>®</sup>  
ArmaPET<sup>®</sup>

# ArmaPET<sup>®</sup>

## PEEL STRENGTH

### INTRODUCTION

Composite sandwich structures consist of two thin, stiff and strong face sheets bonded to a relatively thick lightweight core to create a strong and stiff assembly with low weight. Composite sandwich structures are widely used in the wind energy, transport, marine and industrial markets due to the combination of high flexural rigidity, strength and low weight.

No matter what core material is used, there is a wide range of potential damage that could occur either during manufacture or in service. The most destructive failure is often delamination at the interface between the face sheet and the core, whereby the sandwich will rapidly lose stiffness and subsequently collapse.

### TEST METHOD

There are several different test methods to assess the bond line strength between the face sheet and the core. Measuring the peel strength of the bond line gives a good indication of whether the sandwich can perform well during its lifetime and of its tolerance to minor damage during manufacture and in service. Different peel strength measurement methods are available, but results from the different methods cannot be readily compared and even small changes in the laminate used will give rise to big changes in the results.

Probably the most reproducible method is the Climbing Drum Peel (CDP) test, in accordance with the ASTM Standard D1781. The CDP test is relatively simple to perform but requires special testing equipment and relatively large test specimens. Also, the skins have to be thin if the results are to be compared to other sandwich configurations.

Other methods include the Cracked Sandwich Beam (CSB) and modified Double Cantilever Beam (DCB) tests. The advantages with these similar methods are that less testing equipment is required and smaller test specimens are used. The disadvantage is that only the exact same laminate thickness and lay-up can be used if results are to be comparable.



Figure 1: DCB samples ready for peel off test

Armacell's standard procedure for peel strength testing is similar to using a DCB type specimen, see Figure 2, and mode 1 fracture measurement, see Figure 3. Instead of calculating the fracture energy, however, we measure the load required to pull the skin of the specimen. This is sufficient for quality testing purposes and for comparing, for example, different core materials or different resins systems.

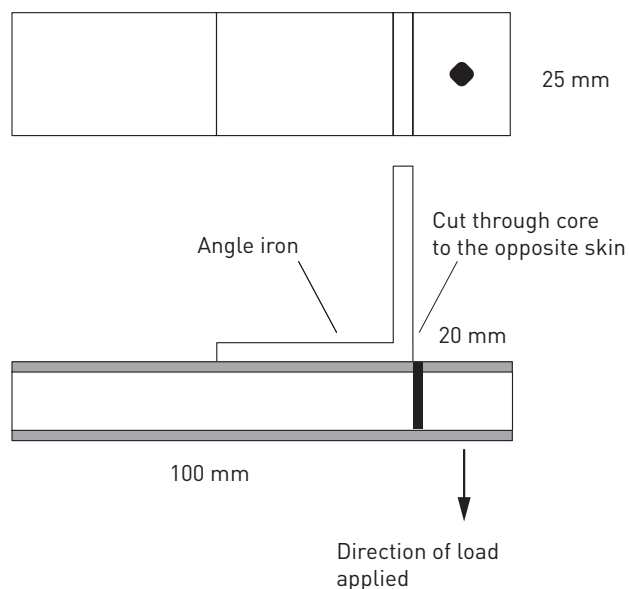


Figure 2: DCB samples set up

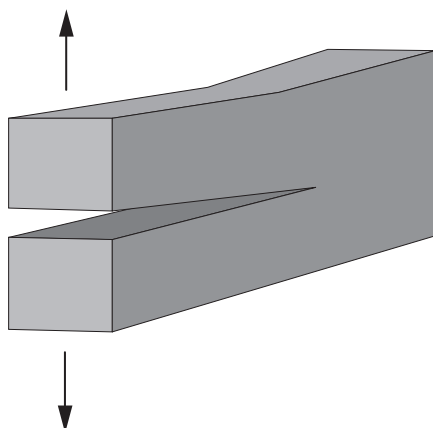


Figure 3: Mode 1 fracture measurement

## Double Cantilever Beam (DCB) Peel Testing

The set-up of the test is according to Figure 2, with specimen dimensions of 100 mm x 25 mm x thickness (typically 20 mm). One test batch should comprise at least five samples, as there is always some scatter in the results.

The samples for the test were prepared in the traditional way by infusing sandwich panels composed of a 20-mm-thick ArmaPET Struct foam core with densities of 70, 115 and 250 kg/m<sup>3</sup> laminated on both sides with three layers of biaxial glass fabric (0/90°; 950g.m<sup>-2</sup>).

To determine the influence of the resin system, a polyester resin and an epoxy resin were used for these tests. The specimen dimensions were 100 × 25 × 20 mm (the core foam plus laminates result in a total thickness of around 24 mm).

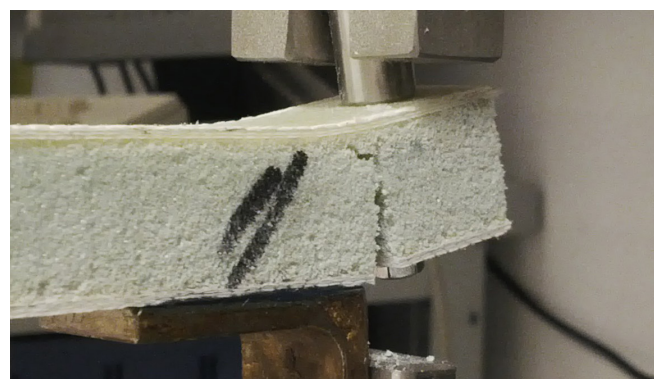
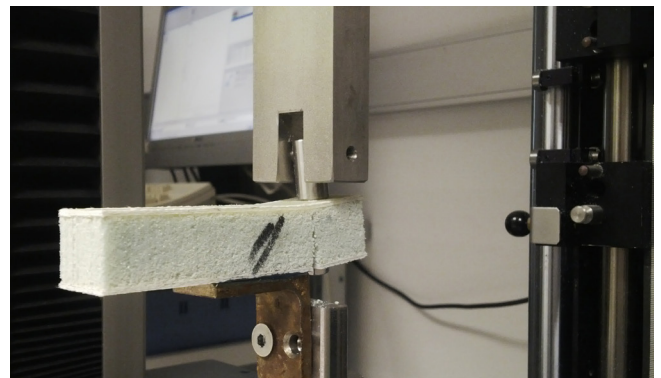


Figure 4: Peel off test on a sample

## 4// PEEL STRENGTH


Usually the peel strength is slightly lower in the transverse direction (perpendicular to the extrusion direction) than in the longitudinal direction but can be assumed to be equal in order to simplify the calculations. In any case, a safety factor has to be used. This difference might be explained by the shape of the cells, since they do have an ovoid shape due to the extrusion/pulling process and this might influence the mechanical anchorage.

A significant increase in peel strength is observed with the use of epoxy, especially for high densities, where the peel strength is at least twice as high as for polyester. So, in cases where good adhesion is critical, it is advisable to use epoxy resins. However, the values obtained for low density samples infused with epoxy are lower than expected, since during previous tests epoxy always performed better than polyester regardless of the density.

In all cases when peeling the skin, a thin layer of PET was observed on the inner side of the skins, which means that a cohesive failure of the substrate occurred and that the maximum strength of the substrate was reached.

Only limited data is available for the comparison between ArmaPET Struct based on virgin PET raw material, called AC grade, which is now discontinued, and today's ArmaPET Struct GRX grade, based on 100% recycled PET. The AC grade infused with polyester resin shows results similar to those for the GRX grade infused with the same kind of resin, whereas the GRX grade infused with epoxy resin exhibits better adhesion.

### PEEL STRENGTH WITH EPOXY AND POLYESTER RESINS

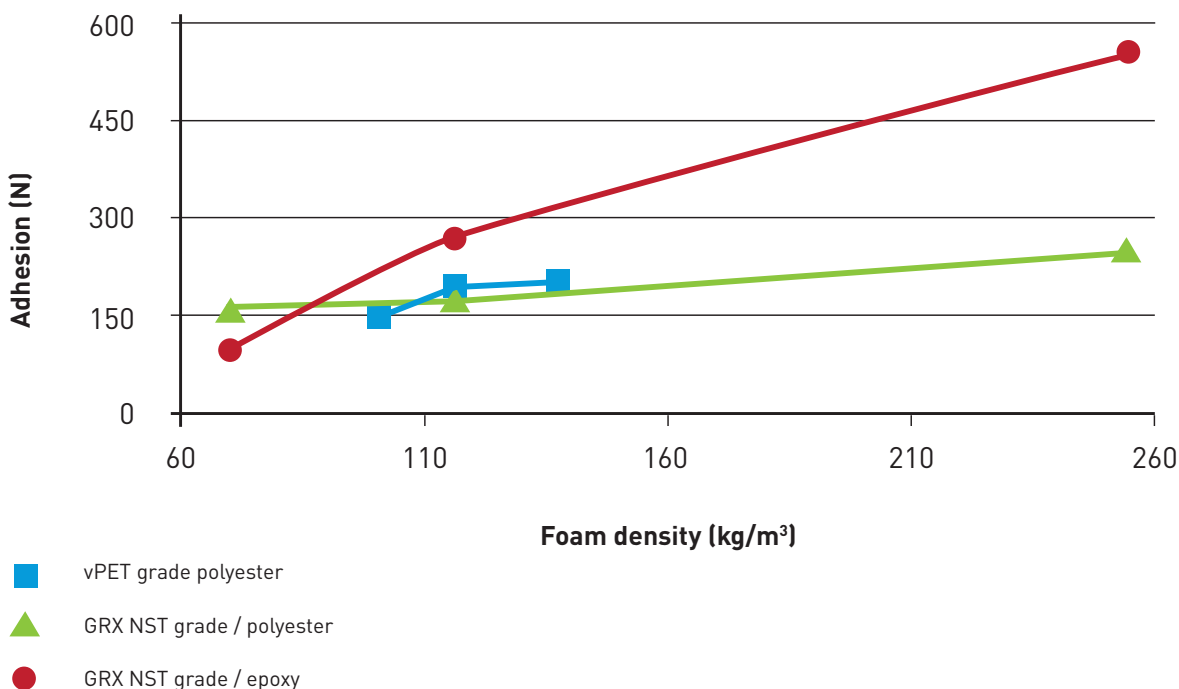




## Surface treatment

To reduce resin uptake during the infusion process, Armacell offers an innovative Surface Treatment (ST) option. This process partially melts the surface and seals the cells that were opened during cutting. The main challenge lies in striking the right balance between minimising resin absorption and maintaining optimal adhesion strength. A surface with a high ratio of open cells tends to absorb excessive resin, whereas a surface that is too tightly sealed can compromise adhesive performance.

This graph illustrates the peel strength between two identical laminate constructions featuring different core types and surface treatment options. Boards produced using the welded (GRX) core demonstrate superior adhesion compared to those made via direct extrusion (ECO). As previously noted, while the surface treatment slightly reduces peel strength, it remains within acceptable limits. Additionally, the adhesion strength is consistent in both directions, further validating the effectiveness of the surface treatment.

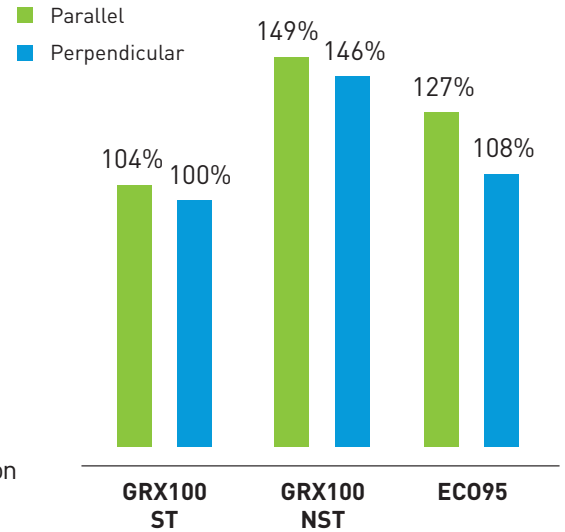


Peel adhesion between different cores, measured parallel or perpendicular to weld lines (GRX100) or to extrusion direction (ECO95)

## Summary

The Armacell DCB type peel strength method is presented. It can be used to check the peel strength properties of the core and laminated skin sheets and to evaluate different parameters such as core density or core type. However, the results are dependent not only on the core material used but also on the resin type, laminate thickness, fibre type etc.

ArmaPET Struct shows excellent adhesion to the laminate with all standard laminating resin systems. Furthermore, it can be observed that the peel strength improves further with an increase in density of the core material, while the surface treatment reasonably decreases the peel strength.

# ARMAPET USED IN VARIOUS SANDWICH CONSTRUCTIONS AROUND THE WORLD



// Five gilded domes of the Russian Orthodox Cathedral in Paris, France. The domes were manufactured off-site and it took 15 minutes to put the largest dome, spanning 12 metres in diameter, in place by crane.



// Façade cladding of King Abdullah KAFD World Trade Centre in Riyadh, Saudi Arabia. It covers a surface area of more than 40,000m². It is the second tallest tower in the area with an observation deck open for public at a height of 300 metres.



// Nose of the CRH3A bullet train that connects the 700km distant cities of Chengdu and Xi'an in Western China in less than four hours. The success of the CRH3A has put an end to flights between the two cities, thus reducing the carbon footprint on this route.



// PET foam house in Nova Scotia, Canada. The 186 m² prototype bungalow consists of 170 ArmaPET cored SIPs and was assembled in just 14 hours. 612,000 recycled PET bottles brought this eco house to life.

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our [Data Protection Policy](#).

© Armacell, 2025. All rights reserved. ® is a trademark of the Armacell Group and is registered in the U.S. and other countries.  
00484 | ArmaPET Struct | Peel Strength | WhitePaper | 062025 | Global | EN Master

## ABOUT ARMACELL

---

As the inventor of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal and mechanical insulation solutions that create sustainable value for its customers. Armacell's products significantly contribute to driving energy efficiency worldwide. With more than 3,300 employees and 26 production plants in 20 countries, Armacell operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for acoustic and lightweight applications, recycled PET products, next-generation aerogel technology and passive fire protection systems.

For more company information, please visit:  
[www.armacell.com](http://www.armacell.com)

For product information, please visit:  
[www.armacell.com/armapet](http://www.armacell.com/armapet)

