


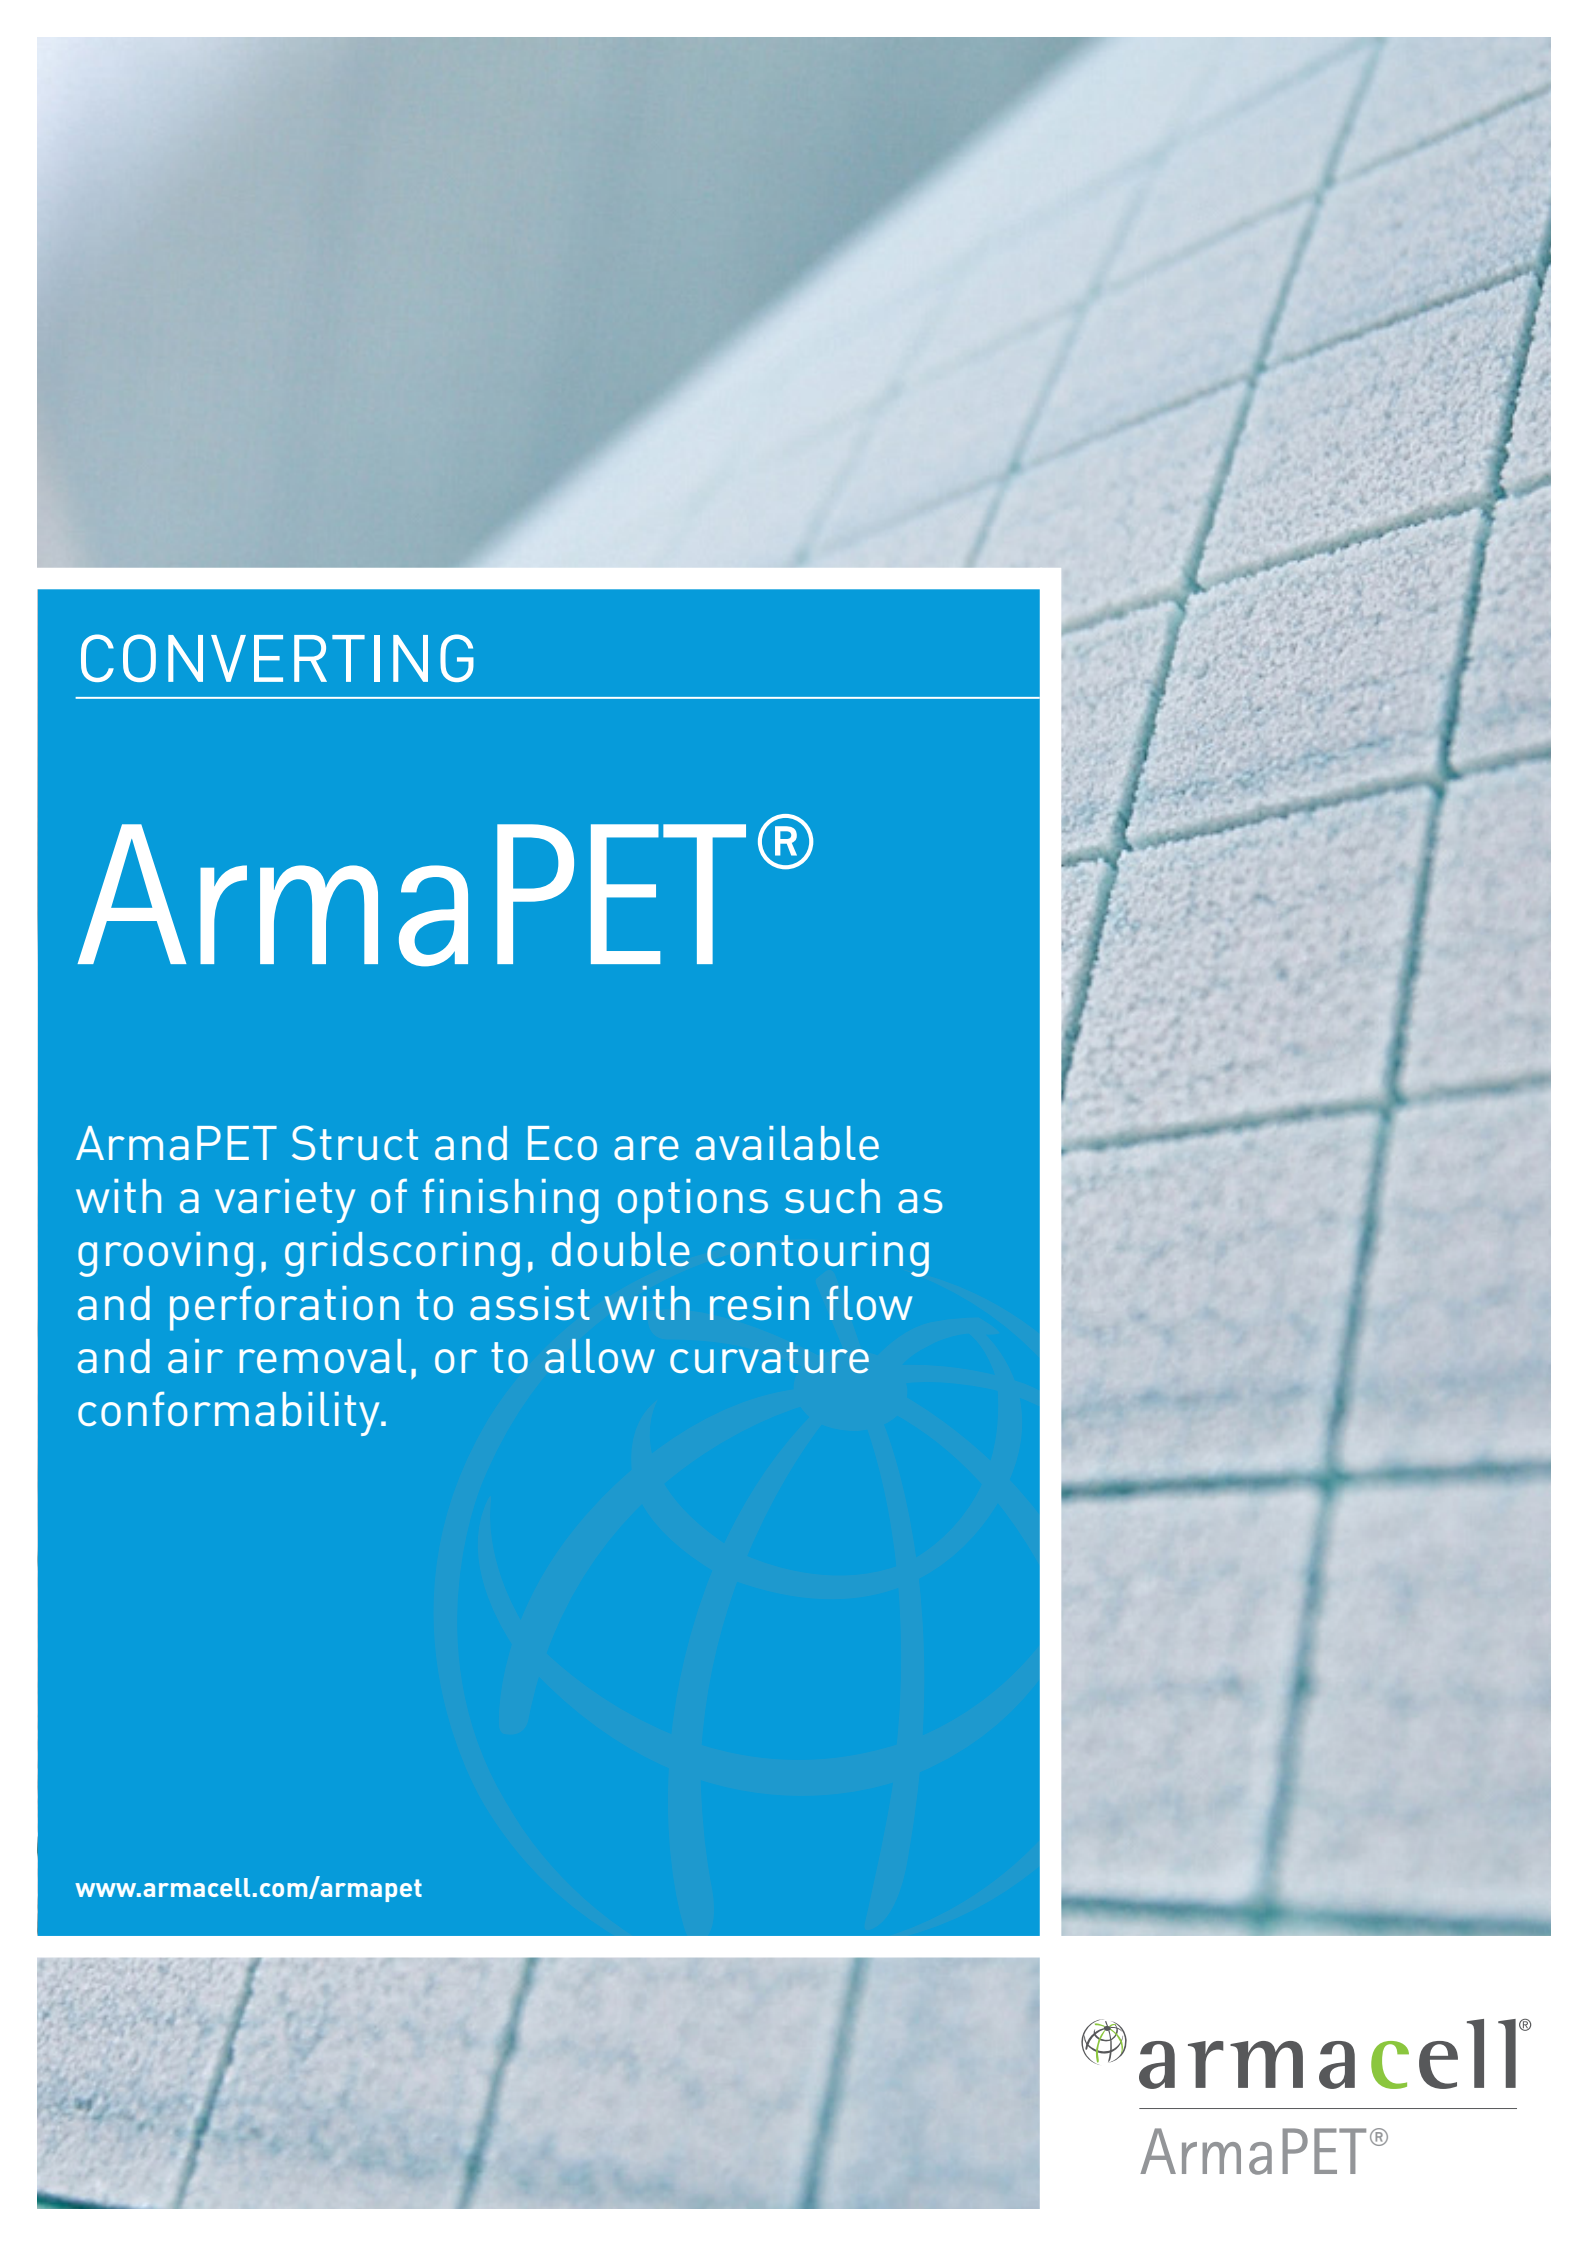

CONVERTING

ArmaPET®

ArmaPET Struct and Eco are available with a variety of finishing options such as grooving, gridscore, double contouring and perforation to assist with resin flow and air removal, or to allow curvature conformability.

www.armacell.com/armapet

 **armacell**[®]
ArmaPET[®]


CONVERTING

ArmaPET®


FLOW

Shallow grooves in one or two directions to enable quick resin transfer in closed moulding processes.

Standard board size	2448 x 1008 mm 2448 x 1220 mm
Groove pattern	20 x 20 mm 30 x 30 mm 20 x 40 mm 40 x 40 mm
Minimum thickness	5 mm

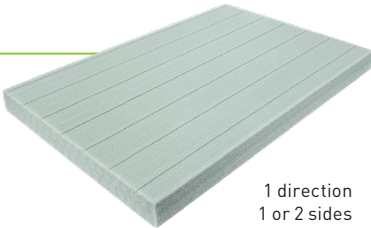


1 direction
1 or 2 sides

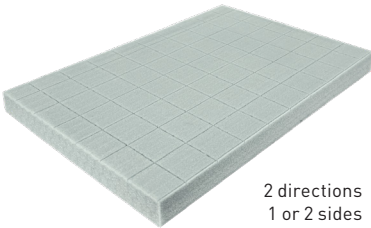

2 directions
1 or 2 sides

FLEX

Deep grooves in the core in one or two directions to give maximum flexibility combined with resin flow for closed moulding processes.

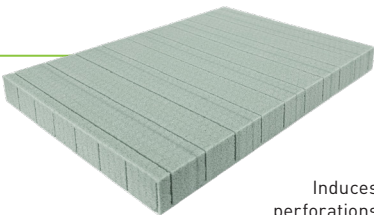


Induces perforations and holes in the foam

Standard board size	2448 x 1008 mm 2448 x 1220 mm
Groove pattern	20 x 20 mm 30 x 30 mm 20 x 40 mm 40 x 40 mm
Minimum thickness	5 mm

FLEXFLOW

Deep grooves in the core in one or two directions on one side to give some flexibility. In combination with shallow resin flow grooves on the other side.

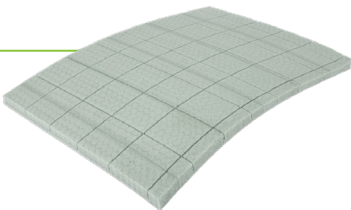

Standard board size	2448 x 1008 mm 2448 x 1220 mm
Groove pattern	20 x 20 mm 30 x 30 mm 20 x 40 mm 40 x 40 mm
Minimum thickness	5 mm

THERMOFORMING

Due to its thermoplastic nature, ArmaPET is well-suited for thermoforming. 3D-shaped or double curved sandwich panels are possible without cutting the foam and thus eliminating core stress concentration and increased resin consumption. **Thermoforming is not offered by Armacell. To be discussed with your sales representative.**



CROSS

Perforations to facilitate resin flow or air removal from one side of the core to the other.



Standard board size

2448 x 1008 mm
2448 x 1220 mm

Minimum thickness

5 mm

GRID SCORED

Provides good flexibility. Sheets are bonded to a glass scrim and cut in squares that provide also good resin flow in-plane.



Standard board size

2448 x 1008 mm
2448 x 1220 mm

Groove pattern


20 x 20 mm
30 x 30 mm
20 x 40 mm
40 x 40 mm

Minimum thickness

5 mm

CROSSFLOW

Shallow groove on one or two sides of the core for resin flow combined with perforations for resin transfer to the opposite side of the core.

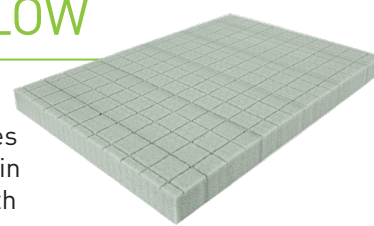

Standard board size

2448 x 1008 mm
2448 x 1220 mm

Groove pattern

20 x 20 mm
30 x 30 mm
20 x 40 mm
40 x 40 mm

Minimum thickness

5 mm

THICKNESS TOLERANCE

+/- 0.3

Optional off-line process, thickness tolerance can be reduced from ± 0.5 mm standard to ± 0.3 mm.

Standard board size

2448 x 1008 mm
2448 x 1220 mm

Minimum thickness

10 mm

Maximum thickness

70 to 150 kg/m³: 60 mm
> 200 kg/m³: 30 mm

SURFACE TREATMENT

Surface treatment without introducing an additional material, minimizes the resin uptake. Applied as per standard in ArmaPET Struct GRX.

Standard board size

1008 x 2448 mm

Thickness

10 to 150 mm

Maximum density

250 kg/m³

GLOSSARY

FLOW // Shallow cuts:

Shallow grooves to improve resin flow/distribution.

FLEX // Deep cuts:

Deep groove providing great formability.

FLEXFLOW // Shallow and deep cuts:

Combination of shallow and deep grooves.

CROSS // Perforation:

Perforations to remove trapped air and create bridges.

CROSSFLOW // Shallow cuts and perforations:

Combination of shallow grooves and perforations.

All converting options may be further discussed with your sales representative.

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our **Data Protection Policy**.

© Armacell, 2025. All rights reserved. ® is a trademark of the Armacell Group and is registered in the U.S. and other countries.
00471 | Converting Thimister | ArmaPET | SpecSheet | 102025 | Global | EN Master

ABOUT ARMACELL

As the inventor of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal and mechanical insulation solutions that create sustainable value for its customers. Armacell's products significantly contribute to driving energy efficiency worldwide. With more than 3,300 employees and 25 production plants in 20 countries, Armacell operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for acoustic and lightweight applications, recycled PET products, next-generation aerogel technology and passive fire protection systems.

For more company information, please visit:
www.armacell.com

For product information, please visit:
www.armacell.com/armapet

