

ENVIRONMENTAL PRODUCT DECLARATION

as per ISO 14025 and EN 15804+A2

Owner of the Declaration	Armacell International S.A.
Publisher	Institut Bauen und Umwelt e.V. (IBU)
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Declaration number	EPD-ARM-20220389-IBA3-EN
Issue date	12.01.2024
Valid to	11.01.2029

ArmaPET® Eco50
Armacell

www.ibu-epd.com | <https://epd-online.com>



1. General Information

Armacell

Programme holder

IBU – Institut Bauen und Umwelt e.V.
Hegelplatz 1
10117 Berlin
Germany

Declaration number

EPD-ARM-20220389-IBA3-EN

This declaration is based on the product category rules:

Insulating materials made of foam plastics, 01.08.2021
(PCR checked and approved by the SVR)

Issue date

12.01.2024

Valid to

11.01.2029



Dipl.-Ing. Hans Peters
(Chairman of Institut Bauen und Umwelt e.V.)



Dr. Martina Bender
(Managing Director Institut Bauen und Umwelt e.V.)

ArmaPET® Eco50

Owner of the declaration

Armacell International S.A.
Westside Village, rue Pafebruch 89B
L-8308 Capellen - GD of Luxembourg
Luxembourg

Declared product / declared unit

The declared product is ArmaPET® Eco50. The declared unit relates to 1 m³ of product, with an average density of 50 kg/m³. The packaging is also included in the calculation. The declared unit is given in [m³].

Scope:

This document relates to ArmaPET® Eco50. For the creation of the life cycle assessment, specific data was collected from the manufacturing plant in Thimister-Clermont in Belgium of the Armacell Group, which corresponds to the annual average and is based on data from 2022 (see 3.8 allocation). The owner of the declaration is liable for the information and evidence on which it is based; the IBU accepts no liability for manufacturer information, life cycle assessment data and evidence. The owner of the declaration shall be liable for the underlying information and evidence; the IBU shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

The EPD was created according to the specifications of EN 15804+A2. In the following, the standard will be simplified as *EN 15804*.

Verification

The standard EN 15804 serves as the core PCR	
Independent verification of the declaration and data according to ISO 14025:2011	
<input type="checkbox"/>	internally
<input checked="" type="checkbox"/>	externally



Dr. Matthew Fishwick,
(Independent verifier)

2. Product

2.1 Product description/Product definition

ArmaPET® Eco50 is a low-density polyethylene terephthalate (PET) foam, based on 100% recycled plastic bottles. Its long-term stability of the insulation properties and the low thermal conductivity secure lifetime insulation performance. The water resistance and the closed-cell structure of the material ensure stable thermal conductivity even after many years of operation. These features also prevent moisture penetration, mildew and rot and therefore offer long-term corrosion protection and minimal maintenance requirements.

Additionally, the material can be thermoformed into curved shapes, welded in pre-fabrication or on site, and is versatile for use in almost any type of finishing options. Its thermoplastic nature also allows for full recyclability of the material after the use phase.

Thanks to Armacell's patented rPET technology, ArmaPET® Eco50 is based on 100% recycled PET and is manufactured according to an energy and resource optimised production process: with the re-use of waste material and no use of ozone-depleting hydrofluorocarbons (HFC) or chlorofluorocarbons (CFC) blowing agents.

For the placing of the product on the market in the European Union/European Free Trade Association /EU/EFTA) (with the exception of Switzerland) the Regulation (EU) No. 305/2011 (CPR) applies. The product needs a declaration of performance taking into consideration ETA No. 21/0623; 27.11.2025; "ArmaPET Eco50 - Factory-made products of extruded, foamed Polyethylene terephthalate (PET) for thermal and or acoustical insulation" and the CE-marking.

For the application and use the respective national provisions apply.

2.2 Application

ArmaPET® Eco50 offers a solution for the (semi-) structural insulation of building envelopes, roofs, floors and internal partitions, in new building construction and the renovation of older buildings.

Intended use, as specified in ETA No. 21/0623, is thermal insulation in walls (including cellar walls), ceilings, floors, roofs, between rafters and timber work. The provisions made in the ETA are based on an assumed intended working life of 50 years for the insulation product. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right product in relation to the expected reasonable working life of the works.

2.3 Technical Data

For further technical data consult the product datasheet available on the website. Acoustic properties are not relevant for ArmaPET® Eco50.

Technical Data

Table in accordance with the Declaration of Performance

Name	Value	Unit
Gross density acc. to EN 1602	50	kg/m ³
Reaction to fire - EN 13501-1	E	-
Compressive strength acc. to EN 826	CS(10\Y)150	N/mm ²
Tensile strength perpendicular to faces	T400 ≤ 80mm TR100 >80mm	N/mm ²
Calculation value for thermal conductivity acc. to EN 12667 and EN 13164 Annex C	<0,032	W/(mK)
Water vapour diffusion resistance factor acc. to EN 12086	>1000	-
Thermal conductivity acc. to EN 12667	<0,030	W/(mK)
Dimensional Stability at 23°C; relative change in length/width EN1603	Δε ≤ ± 1	%
Dimensional Stability at 70°C and 90% RH; relative change in length/width/thickness EN1604	Δε ≤ 4	%
Dimensions: Thickness acc. to EN823	T3	
Dimension: width acc. to EN822	± 8mm for boards ≤ 1500mm; ±10mm for boards > 1500mm	
Dimension: length acc. to EN822	± 8mm for boards ≤ 1500mm; ±10mm for boards > 1500mm	
Squareness acc. to EN824	<5	mm/m
Flatness acc. to EN825	<6	mm
Long term water absorption by immersion acc. to EN12087, method 2A	WL(T)3	
Deformation under specified compressive load and temperature condition acc. to EN1605	DLT(2)5	
Longterm water absorption by diffusion acc. EN12088 / ISO16536	WD(V)2 for 50 200mm	
Freeze-thaw resistance acc. EN12091 / ISO 16546	FTCD4 for 50- 200mm	

Performance data of the product in accordance with the declaration of performance with respect to its essential characteristics according to ETA No. 21/0623; 27.11.2025; "ArmaPET Eco50 - Factory-made products of extruded, foamed Polyethylene terephthalate (PET) for thermal and or acoustical insulation".

2.4 Delivery status

ArmaPET® Eco50 is supplied in boards. A flexible thickness range from 20 to 200 mm is available, with standard widths of 1000 or 1220 mm and length options between 500 and 3000 mm.

2.5 Base materials/Ancillary materials

Name	Value	Unit
Recycled PET	94,8	Gew.-%
Fillers and modifiers	1,2	Gew.-%
Blowing agent	4	Gew.-%

ArmaPET® Eco50 is a low density, closed-cell foam, produced based on 100% recycled PET. Mechanically recycled PET is mixed in a molten state with additives that ensure a stable foaming process. These include nucleating agents, viscosity modifiers, foam stabilisers and a physical blowing agent.

The nucleating agent determines the foam's cell size distribution. The viscosity modifier ensures sufficient melt strength for foaming by increasing the molecular weight of the PET, broadening its molecular weight distribution and introducing long-chain branches. The physical blowing agent expands the foam to achieve the required density range. Eventually, the additional modifiers and stabilisers support the process stability and help to avoid cell coalescence.

This product contains substances listed in the candidate list (date: 14.06.2021) exceeding 0.1 percentage by mass: **no**.

This product contains other CMR substances in categories 1A or 1B which are not on the candidate list, exceeding 0.1 percentage by mass: **no**.

Biocide products were added to this construction product or it has been treated with biocide products (this then concerns a treated product as defined by the (EU) Ordinance on Biocide Products No. 528/2012): **no**.

2.6 Manufacture

ArmaPET Eco50 foam boards are manufactured based on mechanically recycled PET, applying the patented technology of Armacell. This method is based on reprocessing post-consumer PET waste to produce recycled flakes, after separation of the polymer from contaminants. It includes sorting and separating of waste, washing it to remove any dirt and contaminants, and further grinding, crushing and sorting carried out by Armacell's suppliers. The recycled product is compliant with the predefined specification of Armacell and is supplied in the form of flakes and granules.

At Armacell, the flakes are processed into granules by melt-extrusion. The granulation process includes pre-drying the flakes to avoid hydrolysis in the extrusion process. The pre-dried flakes are fed into an extruder where the material is molten and homogenized. A vacuum extraction section is used to remove volatile contaminants from the melt. After final filtration the material is granulated by underwater cutting followed by crystallization of the obtained rPET granules.

Obtained recycled PET granules are further processed into foam through foaming extrusion, in the presence of halogen-free supercritical fluid used as a physical blowing agent. Further components of the foam include additives for foam nucleation, cell stabilization and melt modification. The patented method of rPET treatment and modification during melt processing allows Armacell to overcome the main disadvantage of mechanical recycling – a decline in the product quality – and to upgrade the quality despite the thermal degradation, photo-oxidation and mechanical stresses.

Another component of the formulation is 'PET Agglomerate', which is obtained from reclaimed PET foam.

The primary source of agglomerate is the PET dust generated by the lateral and surface grinding operations in the downstream of the foam extrusion process (Eco50 internal loop). Another source of agglomerate, is PET foam which is diverted from the waste stream of other PET foam products at Armacell. All reclaimed foam cut-offs are crushed and compacted in a first step. In the second step, the pre-compacted particles are mixed with reclaimed PET dust and partially molten by shear forces and formed into agglomerate through a template. The extruded foamed PET boards with homogeneous and closed-cell structure are calibrated, edge cut

and surface grinded to obtain the final product with the required dimensions and surface planarity.

PRODUCT STAGE Eco50

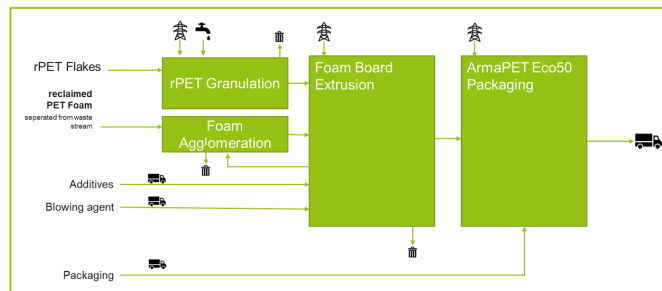


Figure: Illustration of the ArmaPET Eco50 Production Process

2.7 Environment and health during manufacturing

All our plants employ environmental monitoring systems, and we exchange ideas and best practices via the internal communications network. We collect key performance indicators on energy use, CO₂ emissions, water consumption and waste management in order to evaluate and continually improve our sustainability performance. 13 of Armacell's plants are environmentally certified acc. to *ISO 14001*, and the energy management systems at our German facilities in Münster and Friesenhofen are certified to *ISO 50001* as well. Environmental management at Armacell is implemented in line with the 'Environment' pillar of the World-Class Armacell Mindset Manufacturing program. This program maintains consistency in standards and sustains the implementation of improved processes. It is based on the systematic identification of losses and non-value-added tasks at Armacell's multi-technology sites.

2.8 Product processing/Installation

ArmaPET® Eco50 can be used on its own and/or as part of a system, depending on the application. It can be handled and installed without any special precautions for personal and environmental protection. Further advice on handling and installation can be found in the related product literature provided by the manufacturer.

2.9 Packaging

ArmaPET® Eco50 boards are stacked on reusable wooden pallets for transport and storage. These pallets comply with the *ISPM15* regulation. All pallets are protected in a way that prevents damage at the corners of the boards, and plastic wrapping ensures protection from moisture and dirt. The polyethylene- and carton-based packaging elements are recyclable and (actually) recycled in the countries having a return system.

2.10 Condition of use

When the products are used for the purpose for which they are intended, there are no changes in the material composition during use, except in the event of extraordinary impacts (see 2.14).

2.11 Environment and health during use

ArmaPET® Eco50 does not contain any Substances of Very High Concern (SVHC) or any compounds that are persistent, bioaccumulative and/or toxic (PBT). No environmental damage or health risks are to be expected during normal conditions of use. ArmaPET® Eco50 has been assessed in terms of the emission of regulated dangerous substances from construction products into indoor air (according to EN16516) and the results confirm that no substances are emitted in quantities above the European limits.

2.12 Reference service life

ArmaPET® materials are long-lasting products with a designed lifetime of 25 to 50 years. The service life is practically only restricted by the lifetime in the application. The insulation performance is maintained throughout the entire service life, thanks to the low water absorption, closed-cell cellular structure and the high solubility of a foaming agent in the PET matrix. The insulation performance can only be compromised by extraordinary impacts and damage during construction. Description of the influences on the ageing of the product when applied in accordance with the rules of technology.

2.13 Extraordinary effects

Fire

According to the European fire classification system, ArmaPET® Eco50 is classified as combustible insulation material of Euroclass E, tested as per EN ISO 11 925-2 by means of the ignitability test. For classes A2 to D, additional classification using the SBI test procedure (Single Burning Item test) in accordance with EN 13823 is required.

Fire protection

Name	Value
Building material class acc. to EN 13501-1	E

Water

ArmaPET® Eco50 is chemically neutral, not water soluble, and if used for the intended purpose does not release any water-soluble substances that might pollute groundwater, rivers or oceans. Water or water vapour has virtually no impact on the thermal conductivity. For water exposure tests please revise the Table of point 2.3 and for water leakages - point 7.2.

Mechanical destruction

ArmaPET® Eco50 is designed for load bearing and non-load bearing (semi-) structural insulation applications and has a compression strength of >150 kPa when used as a standalone material. It can withstand certain mechanical impacts during handling and storage without significant damage.

2.14 Re-use phase

In the non-contaminated form, the product is fully recyclable by a mechanical recycling scheme for PET. It could be shredded into smaller pieces and reprocessed to granules using extrusion and reused as tertiary recycled pellets in the non-food contact applications (e.g. for foaming processes, fibres spinning, injection moulding, etc.).

In case of severe contamination and problems with separation, the product could be recycled via chemical recycling with bis(2-hydroxyethyl) terephthalate (BHET) or dimethyl terephthalate (DMT) or monomers purified terephthalic acid and monoethylene glycol (PTA and MEG, respectively) recovery, depending on the recycling method (glycolysis or hydrolysis).

2.15 Disposal

Dispose of the materials according to local regulations. Regulated by the European Waste Catalogue: Waste code 07 420 (other non-hazardous plastic waste). Note: Please observe Commission Decision 2001/118/EC.

2.16 Further information

Further Information on ArmaPET Eco50 can be found on the manufacturer's website www.armacell-core-foams.com

3. LCA: Calculation rules

3.1 Declared Unit

The declared product is an ArmaPET Eco50. The declared unit relates to 1 m³ of product. The packaging with 3,039 kg is also included in the calculation. The following table shows the data of the declared unit.

Declared unit

Name	Value	Unit
Declared unit	1	m³
Average density	50	kg/m³
Weight	50	kg

3.2 System boundary

The type of the EPD is from the cradle to the factory gate with options, modules C1-C4 and module D. The following information modules are defined as system limits in this study:

A1–A5 Product development:

A1 – Production of raw materials

A2 – Transport to the manufacturer

A3 – Production

A4 – Transport from the factory gate to the construction site

A5 – Installation of the products in the building

End of life stage (C1- C4):

C1, deconstruction/demolition,

C2, transport,

C3, waste treatment ,

C4, disposal.

Reuse, recovery and recycling potential (D)

In order to precisely record the indicators and environmental

impacts of the declared unit, a total of 8 information modules are considered. The information modules A1 to A3 describe the provision of materials, the transport to the production site, as well as the production processes of the product itself.

3.3 Estimates and assumptions

For the rPET flakes, no specific data could be provided by the supplier. In the background databases only rPET granulate is available. For this reason, the background data for rPET pellets without the influence of the electrical energy of the granulation, were used for the calculation of the rPET flakes in module A1. This assumption is important for the calculation of the EPD as a whole, in order to avoid double counting, because in module A3 a specific granulation at Armacell is calculated for this material.

3.4 Cut-off criteria

The cut-off criterion according to EN 15804+A2 is applied. All energy and mass inputs were taken into account.

3.5 Background data

The background data base of the LCA for Experts and ecoinvent 3.9.1 databases, to which this study also refers, is documented under the following link.(Sphera)

3.6 Data quality

For the preparation of the life cycle assessment, specific data was collected the Thimister-Clermont plant in Belgium, from the company Armacell International S.A. and from the year 2022. The background data from the LCA for Experts and ecoinvent 3.9.1 databases are from the year 2023 and therefore of high relevance.

The masses of the different components of the insulation boards are from the composition data.

The data quality is rated as adequate.

3.7 Period under review


The life cycle inventory analysis data provided by the manufacturer is from 2022 and corresponds to the annual average.

3.8 Geographic Representativeness

Land or region, in which the declared product system is manufactured, used or handled at the end of the product's lifespan: Europe

3.9 Allocation

The data presented in this EPD for ArmaPET Eco50 are collected based on the yearly manufacturing output of Armacell's plant in Thimister-Clermont/ Belgium. Currently, this is the only location manufacturing Eco50. In general, the split between all the manufactured items covers:

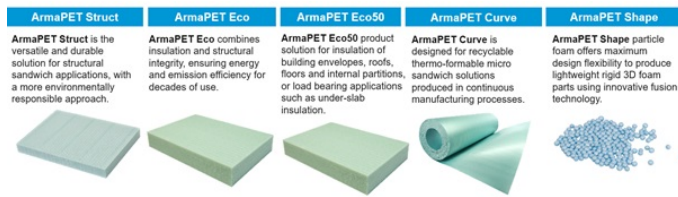

with a total mass of all the manufactured foams equal to 8.770.995,60 kg, out of which 367.683 kg accounts for ArmaPET Eco50. The data linked to energy and water consumptions are collected collectively at the plant level and are allocated to the processes used in the Eco50 production based on individual allocation factors for the processes. The energy consumption data are collected separately for the extrusion, granulation, and warehousing operations and are allocated to Eco50 production based on those allocation factors. The total waste, measured separately on a yearly basis for all the produced items is allocated. Based on the total allocation factor for Eco50.

3.10 Comparability

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to *EN 15804* and the building context, respectively the product-specific characteristics of performance, are taken into account.

The database referred to in this study is LCA for Experts by Sphera and ecoinvent 3.9.1.

4. LCA: Scenarios and additional technical information

Characteristic product properties biogenic carbon

No renewable raw materials are used in the product. Therefore, the biogenic carbon is shown as zero. The following raw materials contain biogenic carbon in the packaging.

Information on describing the biogenic Carbon Content at factory gate

Name	Value	Unit
Biogenic carbon content in accompanying packaging	1.27	kg C

Note: 1 kg of biogenic carbon is equivalent to 44/12 kg of CO₂

Transport to the building site (A4)

The transport model considers a construction site in Western Europe (Germany, Benelux). The scenario for the distribution phase assumes a standard distance of 500 km.

The transported quantity corresponds to the transport of the products and their packaging to the construction site.

Name	Value	Unit
Transport distance	500	km
Gross density of products transported	53.009	kg/m ³

Installation into the building (A5)

The application phase considers:

-Product losses

-Waste treatment (product losses, product packaging).

Products are installed on the floor or on the wall manually.

There are different ways to install the product, it could be fixed with adhesive, mechanical fixing, etc. The most representative application is just laid out on the floor and kept in place by the

weight of the floor. Due to the different methods, auxiliary parts (screws, adhesive) are not included in the model.

Name	Value	Unit
Material loss	1.5	kg
Plastic Packaging Waste	0,075	kg
Cardboard Waste	0,510	kg
Wood Waste	2,42	kg

End of life (C1-C4)

The product is demolished with an electric saw.

The electrical energy consumption for the tool is a value of 0.6 MJ is assumed for the declared unit. The electricity consumption is calculated with one euro electricity mix. The rubble is transported per truck 50 km to the waste treatment plant.

Name	Value	Unit
Collected separately waste type waste type	50	kg
Recycling	24.2	kg
Energy recovery	2.6	kg

Reuse, recovery and/or recycling potentials (D), relevant scenario information

Module D shows the utilization of the waste from the specified unit. It is assumed that 90 % is recycled and 10 % is thermally utilized. Module D does not take into account the 23,067 kg of PET foam recovered from the other lines.

Name	Value	Unit
ArmaPET Eco 50	24,2	kg

The recycling potential of the ArmaEco 50 (45kg) is credited in this module. A collection rate of 90% is assumed.

5. LCA: Results

DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; ND = MODULE OR INDICATOR NOT DECLARED; MNR = MODULE NOT RELEVANT)

Product stage			Construction process stage		Use stage							End of life stage				Benefits and loads beyond the system boundaries
Raw material supply	Transport	Manufacturing	Transport from the gate to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	MND	MND	MNR	MNR	MNR	MND	MND	X	X	X	X	X

RESULTS OF THE LCA - ENVIRONMENTAL IMPACT according to EN 15804+A2: 1 m³ ArmaPET Eco 50

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-total	kg CO ₂ eq	3.48E+01	1.98E+00	6.22E+00	5.44E-02	1.88E-01	1.63E+00	5.96E+00	-2.76E+01
GWP-fossil	kg CO ₂ eq	3.97E+01	1.96E+00	8.41E-01	5.44E-02	1.86E-01	1.63E+00	5.96E+00	-2.76E+01
GWP-biogenic	kg CO ₂ eq	-5.38E+00	0	5.38E+00	0	0	0	0	0
GWP-luluc	kg CO ₂ eq	5.2E-01	1.8E-02	-1.54E-04	5.84E-06	1.7E-03	1.15E-03	7.48E-06	-3.2E-02
ODP	kg CFC11 eq	1.06E-06	1.7E-13	-1.32E-11	9.92E-13	1.6E-14	2.75E-11	3.81E-13	-9.3E-07
AP	mol H ⁺ eq	1.28E-01	2.13E-03	-1.84E-03	1.15E-04	2.2E-04	3.85E-03	5.69E-04	-1.03E-01
EP-freshwater	kg P eq	1.17E-02	7.07E-06	-1.29E-06	2.01E-07	6.68E-07	5.97E-06	9.02E-08	-1.04E-02
EP-marine	kg N eq	4.94E-02	7.19E-04	-6.34E-04	2.75E-05	7.48E-05	1.07E-03	1.61E-04	-3.13E-02
EP-terrestrial	mol N eq	3.58E-01	8.51E-03	-5.39E-03	2.87E-04	9.04E-04	1.14E-02	2.74E-03	-2.53E-01
POCP	kg NMVOC eq	7.32E-01	1.86E-03	-1.84E-03	7.33E-05	1.89E-04	2.87E-03	4.5E-04	-9.2E-02
ADPE	kg Sb eq	1.93E-04	1.25E-07	-7.74E-08	8.34E-09	1.18E-08	3.71E-07	3.56E-09	-1.64E-04
ADPF	MJ	1.03E+03	2.64E+01	-5.38E+01	1.13E+00	2.49E+00	3.37E+01	9.64E-01	-4.73E+02
WDP	m ³ world eq deprived	8.99E+00	2.23E-02	7.3E-01	1.2E-02	2.11E-03	3.55E-01	5.3E-01	-9.66E+00

GWP = Global warming potential; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential of land and water; EP = Eutrophication potential; POCP = Formation potential of tropospheric ozone photochemical oxidants; ADPE = Abiotic depletion potential for non-fossil resources; ADPF = Abiotic depletion potential for fossil resources; WDP = Water (user) deprivation potential

RESULTS OF THE LCA - INDICATORS TO DESCRIBE RESOURCE USE according to EN 15804+A2: 1 m³ ArmaPET Eco 50

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	3.75E+02	1.87E+00	-3.85E+00	6.76E-01	1.76E-01	1.89E+01	2.45E-01	-5.86E+01
PERM	MJ	7.64E+00	0	0	0	0	0	0	0
PERT	MJ	3.75E+02	1.87E+00	-3.85E+00	6.76E-01	1.76E-01	1.89E+01	2.45E-01	-5.86E+01
PENRE	MJ	1.03E+03	2.64E+01	-5.38E+01	1.13E+00	2.5E+00	3.37E+01	9.64E-01	-4.73E+02
PENRM	MJ	4.4E+00	0	0	0	0	0	0	0
PENRT	MJ	1.03E+03	2.64E+01	-5.38E+01	1.13E+00	2.5E+00	3.37E+01	9.64E-01	-4.73E+02
SM	kg	2.31E+01	0	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0
FW	m ³	3.12E-01	2.06E-03	1.28E-02	5.46E-04	1.94E-04	1.58E-02	1.25E-02	-2.29E-01

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

RESULTS OF THE LCA - WASTE CATEGORIES AND OUTPUT FLOWS according to EN 15804+A2: 1 m³ ArmaPET Eco 50

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
HWD	kg	1.01E-06	9.78E-11	-6.12E-09	-8.86E-11	9.24E-12	-2.44E-09	2.21E-11	-1.75E-09
NHWD	kg	2.51E-01	3.81E-03	1.04E-01	8.29E-04	3.6E-04	2.35E-02	2.82E-02	-1.64E-02
RWD	kg	9.39E-02	3.42E-05	-4.72E-03	1.8E-04	3.23E-06	4.99E-03	5.81E-05	-2.57E-03
CRU	kg	0	0	0	0	0	0	0	0
MFR	kg	0	0	0	0	0	0	0	0
MER	kg	0	0	0	0	0	0	0	0
EEE	MJ	0	0	0	0	0	0	0	0
EET	MJ	0	0	0	0	0	0	0	0

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy

RESULTS OF THE LCA – additional impact categories according to EN 15804+A2-optional: 1 m³ ArmaPET Eco 50

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
PM	Disease incidence	ND	ND	ND	ND	ND	ND	ND	ND
IR	kBq U235 eq	ND	ND	ND	ND	ND	ND	ND	ND
ETP-fw	CTUe	ND	ND	ND	ND	ND	ND	ND	ND
HTP-c	CTUh	ND	ND	ND	ND	ND	ND	ND	ND
HTP-nc	CTUh	ND	ND	ND	ND	ND	ND	ND	ND
SQP	SQP	ND	ND	ND	ND	ND	ND	ND	ND

PM = Potential incidence of disease due to PM emissions; IR = Potential Human exposure efficiency relative to U235; ETP-fw = Potential comparative Toxic Unit for ecosystems; HTP-c = Potential comparative Toxic Unit for humans (cancerogenic); HTP-nc = Potential comparative Toxic Unit for humans (not cancerogenic); SQP = Potential soil quality index

Disclaimer 2 – for the indicators 'abiotic depletion potential for non-fossil resources', 'abiotic depletion potential for fossil resources', 'water (user) deprivation potential, deprivation-weighted water consumption', 'potential comparative toxic unit for ecosystems', 'potential comparative toxic unit for humans – cancerogenic', 'Potential comparative toxic unit for humans - not cancerogenic', 'potential soil quality index'. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high as there is limited experience with the indicator

6. LCA: Interpretation

The dominance analysis shows that the main causes of environmental impacts and indicators are to be found in information module A1. This can be seen in the total global warming potential for material supply with approx. 27%, related to all information modules and a saving of 35% from information module D.v

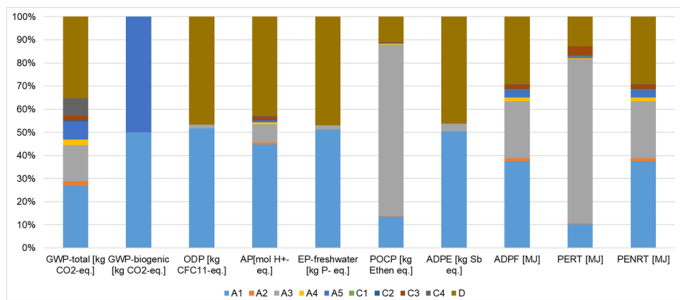


Diagram: Dominance analysis - Modules A1 to D

If we look at the material supply for the product and the packaging in detail, it becomes clear that two raw materials contribute decisively to the respective environmental impacts and indicators. The material supply of the ArmaPET Eco 50 generates approx. 84% of the total global warming potential and approx. 95% of the total non-renewable primary energy in the information module A1. For wood, it is approx. 13% of the total global warming potential and approx. 3% of the total non-renewable primary energy in the information module A1.

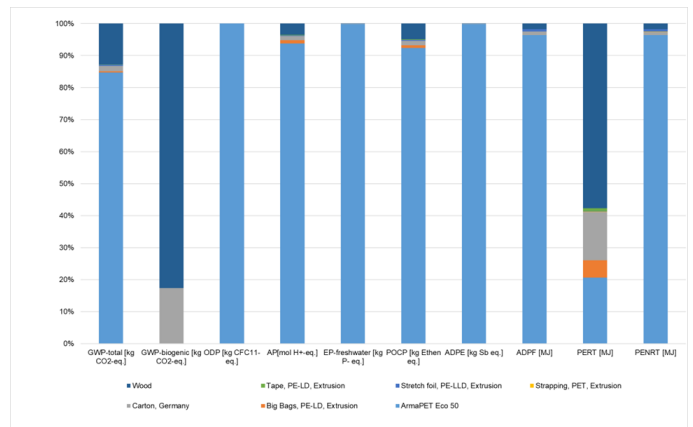


Diagram: Dominance analysis A1 –Raw material acquisition

If we look at the exact composition of the ArmaPET Eco 50, it becomes clear that the main contributor to the global warming potential is the rPET flakes with approximately. 78%.

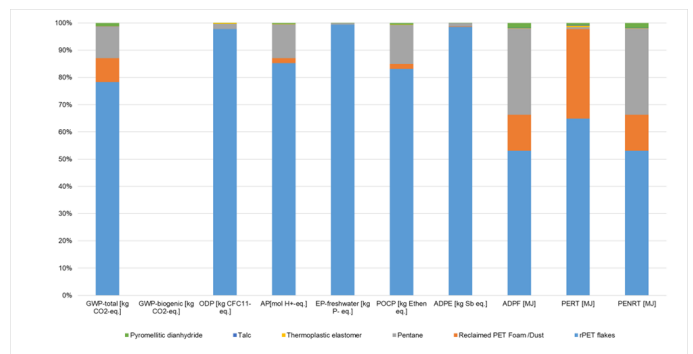


Diagram: Dominance analysis A1 -Raw material acquisition of ArmaPET Eco50

In the information module A3 it is clear that the main cause of environmental impact and indicators is in the production of ArmaPET Eco 50, with a global warming potential of 98%.

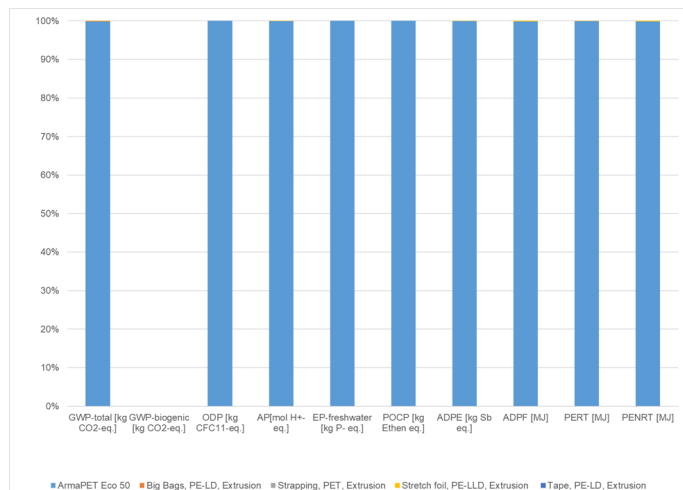


Diagram: Dominance analysis A3 – Production

7. Requisite evidence

7.1 VOC emissions

The product has been tested for determination of the volatile organic compound emissions according to EN16516:2017 'Construction products: Assessment of release of dangerous substances - Determination of emissions into indoor air'. The test has been performed by Servaco/ Normec Product Testing (Wetteren, Belgium) on June 11th, 2021, and the results are covered by the test report SPT2021-R084. The data are expressed for Floor and Wall application.

AgBB overview of results (28 days [$\mu\text{g}/\text{m}^3$])

Name	Value	Unit
TVOC (C6 - C16) Floor application	27	$\mu\text{g}/\text{m}^3$
Sum SVOC (C16 - C22) Floor application	<5	$\mu\text{g}/\text{m}^3$
R (dimensionless) Floor application	3	-
VOC without NIK Floor application	27	$\mu\text{g}/\text{m}^3$
Carcinogenic Substances Floor application	<1	$\mu\text{g}/\text{m}^3$
TVOC (C6 - C16) Wall application	69	$\mu\text{g}/\text{m}^3$
Sum SVOC (C16 - C22) Wall application	<5	$\mu\text{g}/\text{m}^3$
R (dimensionless) Wall application	0,0007	-
VOC without NIK Wall application	69	$\mu\text{g}/\text{m}^3$
Carcinogenic Substances Wall application	<1	$\mu\text{g}/\text{m}^3$

7.2 Leaching performance

Measurement of leaching performance has been indicatively tested based on DIN EN 13468: 'Thermal insulating products for building equipment and industrial installations - Determination of trace quantities of water soluble chloride, fluoride, silicate, and sodium ions and pH', at Armacell. Test temperature was 100 °C, with a leaching time of 0,5 h. The results on water leachable ions specified in mg/kg are summarized in the table.

Chloride (Cl)	Fluoride (F)	Silicate (SiO_3^{2-})	pH value
54 mg/kg	10 mg/kg	27 mg/kg	8,4

8. References

CML 2001 April. 2015

Indicators for environmental impacts
Leiden: Universit at Leiden
<http://cml.leiden.edu/software/data-cmlia.html#downloads>
(30.11.2021)

ECHA-List

Candidate List of substances of very high concern for Authorisation,
<https://echa.europa.eu/candidate-list-table> (2021)

CPR

Regulation (EC) No 305/2011, Construction Products Regulation

DIN EN 824

DIN EN 824:2013-05:Thermal insulating products for building

applications - Determination of squareness.

DIN EN 825

DIN EN 825:2013-10-23: Thermal insulating products for building applications - Determination of flatness.

DIN EN 826

DIN EN 826:2013: Thermal insulating products for building applications - Determination of compression behaviour.

DIN EN 1603

DIN EN 1603:2013-05: Thermal insulating products for building applications - Determination of dimensional stability under constant normal laboratory conditions (23 °C/ 50 % relative humidity).

DIN EN 1604

DIN EN 1604:2013-05:Thermal insulating products for building applications - Determination of dimensional stability under specified temperature and humidity conditions.

DIN EN 1605

DIN EN 1605:2013-05:Thermal insulating products for building applications - Determination of deformation under specified compressive load and temperature conditions.

DIN EN 1606

DIN EN 1606: 2013: Thermal insulating products for building applications - Determination of compressive creep.

DIN EN 1607

DIN EN 1607:2013: Thermal insulating products for building applications - Determination of tensile strength perpendicular to faces.

DIN EN 12091

DIN EN 12091:2013: Thermal insulating products for building applications - Determination of freeze-thaw resistance.

DIN EN 12667

DIN EN 12667:2001: Thermal performance of building materials and products - Determination of thermal resistance by means of guarded hot plate and heat flow meter methods - Products of high and medium thermal resistance.

DIN EN 13468

DIN EN 13468: 2001 Thermal insulating products for building equipment and industrial installations - Determination of trace quantities of water-soluble chloride, fluoride, silicate, and sodium ions and pH.

DIN EN 15801

DIN EN 15801:2010: Conservation of cultural property - Test methods - Determination of water absorption by capillarity.

DIN EN 29052

DIN EN 29052-1:1991: Acoustics; determination of dynamic stiffness - Part 1: Materials used under floating floors in dwellings.

EAD

European Assessment Document no. 040179-00-1201, March 2016, 'Factory-made products of extruded, foamed Polyethylene terephthalate (PET) for thermal and/or acoustical insulation'.

ETA

European Technical Assessment No. 21/0623; 26.10.2022; "ArmaPET Eco50 - Factory-made products of extruded, foamed Polyethylene terephthalate (PET) for thermal and or acoustical insulation".

ecoinvent 3.9.1

Background database: ecoinvent 3.9.1
Zürich: ecoinvent
<http://www.ecoinvent.org>
(23.05.2023).

EN 1602

EN 1602:2013: Thermal insulating products for building applications - Determination of the

apparent density.

EN1609

EN1609:2013: Thermal insulating products for building applications - Determination of short-term water absorption by partial immersion.

EN 11925

EN ISO 11925-2:2020: Reaction to fire tests - Ignitability of products subjected to direct impingement of flame - Part 2: Single-flame source test.

EN 12086

DIN EN 12086:2013-06:Thermal insulating products for building applications - Determination of water vapour transmission properties.

DIN EN 12087

DIN EN 12087:2013-06:Thermal insulating products for building applications - Determination of long term water absorption by immersion.

EN 12088

EN 12088:2013: Thermal insulating products for building applications - Determination of long-term water absorption by diffusion.

EN 12089

EN 12089:2013: Thermal insulating products for building applications - Determination of bending behaviour.

EN 13164

EN 13164:2012 Annex C: Thermal insulation products for buildings - Factory made extruded polystyrene foam (XPS) products – Specification.

EN 13501

EN13501-1: 2018 : Fire classification of construction products and building elements - Part 1: Classification using data from reaction to fire tests.

EN13823

EN13823:2020: Reaction to fire tests for building products - Building products excluding floorings exposed to the thermal attack by a single burning item.

EN 15804

EN 15804:2012+A2:2019 + AC:2021, Sustainability of construction works - Environmental Product Declarations - Core rules for the product category of construction products.

EN 16516

EN 16516:2017 Construction products: Assessment of release of dangerous substances - Determination of emissions into indoor air.

EN 16535

EN ISO 16535:
2019: Thermal insulating products for building applications - Determination of long-term water absorption by immersion.

European Waste Catalogue

2001/118/EC: Commission Decision of 16 January 2001 amending Decision 2000/532/EC as regards the list of wastes (Text with EEA relevance) (notified under document number C(2001) 108)
<https://op.europa.eu/en/publication-detail/-/publication/429c2c5d-9be3-11e4-872e>

01aa75ed71a1/language-en

IBU 2021

General Instructions for the EPD programme of Institut Bauen und Umwelt e.V. Version 2.0,
Berlin: Institut Bauen und Umwelt e.V., 2021 www.ibu-epd.de

ISO 1402

DIN EN /ISO14025:2011-10/, Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14001

ISO 14001:2015: Environmental management systems - Requirements with guidance for use.

ISO 14044

DIN EN ISO14044:2006-10: Environmental management - Life cycle assessment - Requirements and guidelines.

ISO 29767

ISO 29767:2019: Thermal insulating products for building applications - Determination of short-term water absorption by partial immersion.

ISO 50001

ISO 50001:2018: Energy management systems - Requirements with guidance for use.

ISPM 15

International Standard for Phyto-sanitary Measures 15: Regulation of wood packaging material in international trade, Adopted 2018; published 2019.

PCR Part A

Product category rules for construction products and services - Calculation rules for the eco-balance and requirements for the background report V1.3, Institut Bauen und Umwelt e.V., 08.2022.

Product category rules for construction products – Part B

Insulating materials made of foam plastics, 01.08.2021.

Servaco/ Normec Product Testing

<https://normecservaco.com/en/dienst/normec-product-testing/>

Sphera

LCA for Experts Software: Ganzheitliche Bilanzierung
Leinfelden-Echterdingen; Sphera
Solution GmbH
<http://www.gabi-software.com/deutsch/index/>
(23.05.2023).

REACH

Regulation (EC) No 1907/2006, Regulation concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)
with further amendments of 14.06.2021.

**Publisher**

Institut Bauen und Umwelt e.V.
Hegelplatz 1
10117 Berlin
Germany

+49 (0)30 3087748- 0
info@ibu-epd.com
www.ibu-epd.com

**Programme holder**

Institut Bauen und Umwelt e.V.
Hegelplatz 1
10117 Berlin
Germany

+49 (0)30 3087748- 0
info@ibu-epd.com
www.ibu-epd.com

**Author of the Life Cycle Assessment**

FIT-Umwelttechnik GmbH
Westerstr. 13
38442 Wolfsburg
Germany

05362 72 69 474
bertram@fit-umwelttechnik.de
www.fit-umwelttechnik.com

**Owner of the Declaration**

Armacell International S.A.
Westside Village, rue Pafebruch 89B
L-8308 Capellen - GD of Luxembourg
Luxembourg

+49-251-7603227
heribert.quante@armacell.com
www.armacell.com